



A/

James B. Middleton

Attorney at Law

P. O. BOX 1968

DECATUR, GEORGIA 30031

TELEPHONE 404-377-5327

FACSIMILE 404-377-5321

PATENT, TRADEMARK
AND COPYRIGHT CAUSES

15 W. PONCE DE LEON AVENUE
SUITE 550
DECATUR, GEORGIA 30030

September 17, 1997

Commissioner of Patents and Trademarks
Washington, D. C. 20231

Attorney File 1531.01.A

Sir:

Transmitted herewith for filing is the patent application of Peter Joseph Jackson for "Breathing Apparatus and Facepiece Therefor".

The application has a total of 42 claims, with 3 independent claims. The applicant is entitled to the benefit of small entity status, so the filing fee is \$627.00.

The application is complete, with 3 sheets of drawings, 2 declarations in support of Small Entity Status, and a check in the amount of \$627.00 to cover the application filing fee. Any additional fees may be charged to Deposit Account No. 13-3160.

Respectfully submitted,


James B. Middleton

JBM/e

Enclosure

254760-6602680

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

PATENT APPLICATION)
Inventor: Peter Joseph Jackson)
Mailed to U.S. PTO 9-17-97 ) Great Britain Filing Date: 18 Sept., 1996
) British Appln. No. 9619459.2
)
)
For: Breathing Apparatus and Facepiece)
Therefor)

PRELIMINARY AMENDMENT

Commissioner of Patents and Trademarks

Washington D. C. 20231

Sir:

Before calculating the Filing Fee for the above identified application, which is submitted herewith, it is requested that the following amendments be entered:

IN THE CLAIMS

Please amend the following claims as indicated:

7(Amended). A facepiece according to [any preceding] claim 1, wherein adjustment means are provided to adjust the distance between the first and second positions of the diaphragm.

8(Amended). A facepiece according to [any preceding] claim 1, wherein the operating means which opens the supply valve is an operating lever.

12(Amended). A facepiece according to [any preceding] claim 1, further including means operable to move the diaphragm to its third position.

13(Amended). A facepiece according to [any preceding] claim 1, including releasable means operable to retain the diaphragm it its third position.

16(Amended). A facepiece according to [any preceding] claim 1, wherein the diaphragm is a speech transmission diaphragm.

17(Amended). A facepiece according to [any preceding] claim 1, wherein the interior of the facepiece is divided into upper and lower compartments, the upper compartment covering the wearer's eyes and having a transparent sight window, and the lower compartment covering the wearer's mouth and nasal openings and having the diaphragm mounted thereon, the supply valve being situated to deliver bteathable gas to the upper compartment, and non-return valves being provided to allow gas to flow from the upper to the lower compartment only.

18(Amended). A facepiece according to [any of claims] claim 1 [to 16], wherein the facepiece covers the wearers nose and mouth only.

25(Amended). A breathing apparatus according to [any of claims] claim 19 [to 24], wherein adjustment means are provided to adjust the distance between the first and second positions of the diaphragm.

26(Amended). A breathing apparatus according to [any of claims] claim 19 [to 25], wherein the operating means which opens the supply valve is an operating lever.

30(Amended). A breathing apparatus according to [any of claims] claim 19 [to 29], wherein the facepiece further includes means operable to move the diaphragm to its third position.

37(Amended). A breathing apparatus according to [any of claims] claim 19 [to 34], wherein the facepiece forms part of a hood or helmet containing the head of the wearer.

38(Amended). A breathing apparatus according to [any of claims] claim 19 [to 34], wherein the facepiece forms part of a garment partially or totally enclosing the wearer.


39(Amended). A hood for a breathing apparatus, incorporating a facepiece according to [any of claims] claim 1 [to 17].

40(Amended). A garment including a facepiece according to [any of claims] claim 1 [to 18].

REMARKS

The foregoing amendments have been made to remove the multiple dependencies of the claims in the original, British, application, and it is requested that the amendment be entered both to reduce the filing fee, and to place the application in better form for examination.

Respectfully submitted,



James B. Middleton, Reg. No. 26,484
Attorney for Applicant

Telephone: 404-377-5327

Attorney File: 1531.01.A

BREATHING APPARATUS AND FACEPIECE THEREFOR

This invention relates to breathing apparatus whereby breathable gas is supplied automatically to the wearer in accordance with his respiratory requirements.

5 More particularly, it relates to apparatus of the "Positive Pressure" type, wherein a pressure which is a predetermined level above the pressure of the ambient atmosphere is maintained within the facepiece so as to prevent inward leakage of air, noxious gases or smoke,
10 etc., from the surrounding atmosphere into the interior of the facepiece.

Breathing apparatus of the positive pressure type is well known, and is commonly used by firefighters for entering smoke-filled buildings or while dealing with
15 chemical spills. For these purposes, it is normal to use apparatus of the self-contained type where a supply of air or other breathable gas is carried by the wearer in one or more high pressure cylinders.

A typical apparatus comprises a cylinder containing
20 compressed air at high pressure, typically 200 to 300 bar, which is carried on the wearer's back by means of a backplate or frame, to which is attached an adjustable webbing harness. The cylinder is fitted with a stop valve, to which is connected a first stage pressure
25 regulating valve which reduces the air supply pressure to a substantially constant value of, say, 7 bar. The air is supplied by this first stage regulator, via a

flexible hose, to a second stage regulator, commonly known as a demand valve, which is attached to a full facepiece of rubber or a similar resilient material. The facepiece is conventionally, held to the wearer's face
5 in a lead-tight manner by means of an adjustable head harness.

The facepiece, which has a transparent visor, is fitted with a non-return valve through which the wearer's exhaled breath is exhausted to atmosphere. This valve
10 is spring loaded so as to open only when pressure within the facepiece exceeds the predetermined level above that of the surrounding atmosphere, this difference normally being set at about 4 millibar.

The demand valve responds to pressure changes within
15 the facepiece and is spring loaded or biased so as to open and admit air from the first regulator when pressure within the facepiece falls, due to inhalation by the wearer or outward leakage, to a level below, say, 3 millibar above the ambient outside pressure. By this
20 means, pressure within the facepiece is maintained at a level of between 3 and 4 millibar above the ambient outside pressure.

In order to allow a fully attired wearer to breathe atmospheric air in areas where it is safe to do so, and
25 thus conserve his limited air supply, and also to facilitate decontamination of the facepiece after use, the connection between the demand valve and the facepiece

00933033 "094797
464760" 6022680

is commonly by means of a bayonet or similar coupling which can be rapidly assembled or disassembled by the wearer.

5 The facepiece is also conventionally fitted with a speech transmission diaphragm, comprising a taut membrane of thin metal or high strength plastics material, supported in a rigid housing in the front of the facepiece and protected by a grille. The clear transmission of speech is of critical importance in many
10 situations in which breathing apparatus is worn, particularly in firefighting.

It is also conventional to provide a gauge to indicate the air pressure in the cylinder, in order to allow the wearer to monitor his air supply. An audible
15 alarm, usually a whistle or bell, indicates when cylinder pressure has fallen to or below a predetermined level.

The typical apparatus described above has a number of limitations and disadvantages, which the present invention seeks to overcome.

20 The facepiece, incorporating the speech transmission diaphragm, spring loaded exhalation valve and connection for the demand valve, is a complex assembly of many parts and is thus costly to produce. Its cost is often so high as to inhibit the provision of personal facepieces to
25 each of the individuals in a firefighting team, for example. This situation, in which facepieces must be "shared" by two or more team members, may give rise to

0893039-094797

objections relating to communicable diseases and certainly necessitates very thorough decontamination of the facepiece after every use. The demand valve, which is in the respiratory circuit and thus also susceptible to contamination, is not easy to clean effectively, due to the need to prevent the ingress into the passages in the valve of water which may subsequently freeze, adversely affecting its operation.

The necessity, for firefighters in particular, to be completely attired in their protective clothing and equipment prior to entering an area where respiratory protection becomes necessary, requires that the demand valve be disconnectable from the facepiece to allow the wearer to breathe atmospheric air whilst conserving his compressed air supply. This procedure, in turn, necessitates that an additional device be incorporated into the demand valve to override its positive pressure operation so as to prevent free escape of air and to restore demand operation when the valve is reconnected to the facepiece or when the wearer first inhales from the valve.

Disconnection of the demand valve from the facepiece exposes the outlet of the valve to the ingress of dirt or water which may later affect operation of the valve, or may be inhaled by the wearer. The demand valve, being mounted externally to the facepiece, is exposed to extremes of temperature and forms a significant

08932039.091797

protrusion which is susceptible to catching on obstructions with the subsequent risk of dislodging the facepiece.

It is the object of the present invention to
5 overcome the disadvantages described by providing a
single integrated assembly incorporating the demand
valve, exhalation valve and speech transmission diaphragm
with a means of allowing the wearer to conserve his
supply of breathable gas and breathe from the atmosphere
10 at will without either removing the demand valve assembly
from the facepiece, or removing the facepiece from his
face. The assembly may thus be permanently, or semi-
permanently attached to the facepiece, greatly increasing
the integrity of the apparatus and reducing the overall
15 size, weight and cost due to the reduced number of
component parts.

It is a further object of the invention to provide
a fixed and minimal differential between the opening
pressure of the exhalation valve and the opening pressure
20 of the demand valve, and to further reduce the overall
work of breathing for the wearer by providing an
exhalation valve of considerably greater area than could
normally be accommodated in a conventional apparatus.
The preferred embodiments of the invention also place the
25 working parts of the breathing valves within the
facepiece where they are protected from extremes of
temperature, and also provide a means of preventing

08932039-091797

ingress of water into the demand valve, so that the complete facepiece and valve assembly may be readily washed and decontaminated by immersion.

STATEMENT OF INVENTION

5 According to a first aspect, a facepiece for a breathing apparatus comprises a supply valve for delivering breathable gas to the interior of the facepiece, and an exhaust valve for allowing the egress of gas from the facepiece, wherein the exhaust valve is
10 a movable diaphragm having a first position wherein it engages with a movable sealing element to seal an exhaust opening in the facepiece, a second position displaced toward the interior of the facepiece relative to the first position and still in sealing engagement with the
15 facepiece, and a third position displaced outwardly of the facepiece relative to the first position and out of sealing engagement with the facepiece, the diaphragm being biased towards the second position by biasing means, and the diaphragm engaging operating means to open
20 the supply valve when in the second position.

 In a second aspect, there is provided a breathing apparatus to supply breathable gas to a wearer, comprising a reservoir of breathable gas at superambient pressure and a facepiece sealable to the wearer's face
25 to cover the nose and mouth, the facepiece comprising a supply valve for delivering air to the interior of the facepiece, and an exhaust valve for allowing the egress

089326039 "094797

of gas from the facepiece, wherein the exhaust valve is a movable diaphragm having a first position wherein it engages with a movable sealing element to seal an exhaust opening in the facepiece, a second position displaced
5 toward the interior of the facepiece relative to the first position and still in sealing engagement with the facepiece, and a third position displaced outwardly of the facepiece relative to the first position and out of sealing engagement with the facepiece, the diaphragm
10 being biased towards the second position by biasing means, and the diaphragm engaging operating means to open the supply valve when in the second position.

In a third aspect, a control arrangement for actuating a demand valve in a facepiece of a breathing
15 apparatus comprises a valve element having an open position wherein the valve element lies outside the facepiece, an initial sealing position wherein the valve element is in sealing contact with an exhaust opening in the facepiece, and an operating position wherein the
20 valve element and exhaust opening are still in sealing contact and the valve element is displaced from the second position toward the interior of the facepiece, the valve element engaging an actuator to open the demand valve while the valve element is in the operating
25 position.

A fourth aspect of the invention provides a demand valve for a facepiece of a breathing apparatus comprising

08932039 "094789"

closure means to prevent ingress of decontaminating fluid into the demand valve.

Embodiments of the invention will now be described in detail, with reference to the accompanying drawings,
5 in which:

Figure 1 shows a sectional side elevation of a preferred embodiment of the invention;

Figure 2 is an enlarged fragmentary view, showing an alternative method of supporting the diaphragm and
10 seal;

Figure 3A is an enlarged sectional view of the demand valve in its closed position; and

Figure 3B is a view similar to Figure 3A, showing the demand valve open to admit air to the facepiece.

Referring now to Figure 1, a speech transmission
15 diaphragm assembly 1 comprises a taut membrane 2 held in a rigid circular housing 3. This diaphragm assembly 1 is rigidly fixed to a lever 4, pivoted at 5 and biased by a spring 6 such that the diaphragm is urged towards
20 a deformable resilient seal 7, clamped at its periphery to a housing 8. The seal 7 is so configured that it can, after making sealing contact with the diaphragm assembly 1, allow further "inward" movement of the diaphragm (towards the wearer) beyond the initial "closed" position
25 seen in Figure 1. The force of the spring 6 is such as to urge the diaphragm to close the opening defined by the seal 7, and is sufficient to deform or deflect the seal

00932039-09179

7 further, beyond this initial "closed" position in the absence of a pressure difference across the diaphragm.

5 A lever 9 is pivoted at 10 and is biased by a light spring 11 so as to close off a small pilot jet 12. When the pilot jet 12 is closed by the lever 9, the pressure within a pilot chamber 13, resulting from air entering the chamber 13 from an air inlet 14 through a metering orifice 15 in the centre of a resilient disc 16, clamps the disc 16 against a face of a flange 17. The relative sizes of the pilot jet 12 and metering orifice 15 are such that the pilot jet 12 can exhaust the pilot chamber 13 faster than the metering orifice 15 can replenish it. Any escape of air through the pilot jet 12 causes a reduction in pressure within the chamber 13, allowing the resilient disc 16 to bow away from the flange 17 under the influence of air pressure at the inlet 14, exposing a series of openings 18 in the flange through which air may pass from the inlet 14 to an outlet 20 and thence into the interior of the facepiece. The free end of lever 9 is provided with an adjusting screw 9a to vary the position of the diaphragm assembly at which initial contact is made with the lever 9. Clearly, embodiments are foreseeable wherein an adjustable abutment is provided on the diaphragm, and a fixed abutment on lever 9. When the screw 9a is correctly adjusted, the diaphragm is just out of contact with the lever when the pressure within the facepiece exceeds atmospheric

08932039-091797

pressure by the required pressure difference. "Inward" movement of the diaphragm 1, beyond that initial contact position will cause the diaphragm to come into contact with the screw 9a at the end of lever 9, and pivot the lever away from the pilot jet 12, allowing air to exit through the jet 12 from the pilot chamber 13.

A resilient non-return flap 19, which protects the valve outlet 20 from the ingress of water, deflects to allow air to pass freely from the valve into the facepiece.

It will be understood from the foregoing that the supply of air to the facepiece is controlled by a two-stage main valve composed of the resilient disc 16, whose opening and closing is in turn controlled by the opening and closing of a pilot arrangement, composed of the pilot chamber 13 and jet 12. The pilot arrangement is in turn controlled by the movement of the lever 9, which is moved by the diaphragm 1 when diaphragm 1 moves inwards in response to a reduction in pressure within the facepiece.

It is emphasised that in operation, forces act on the diaphragm due to the resilient nature of the seal 7, the biasing spring 6 of the diaphragm assembly 1, and the force exerted by pressure differences on the diaphragm. The biasing spring 6 is sufficiently strong to move the diaphragm, in the absence of any pressure difference across the diaphragm, from a first position in which initial contact is made with seal 7 but with seal 7

0893033-03439

unmoved, into a third position in which seal is moved toward the wearer and the diaphragm 1 contacts the screw 9a of lever 9. The diaphragm 1 and seal 7 remain in sealing contact throughout this movement.

5 When the facepiece is sealed to the wearer's face, initially no pressure difference exists between the interior of the diaphragm and the outside atmosphere. The diaphragm 1 is urged inward by the biasing spring 6. Seal 7 is deformed as diaphragm 1 moves inward under the
10 action of spring 6. Diaphragm 1 contacts and moves lever 9 to open the pilot valve 12, and air is admitted into the facepiece until the pressure within the facepiece rises to a superatmospheric level sufficient to urge the diaphragm 1 to move outwards against the force of spring
15 6. As the diaphragm 1 moves outwardly under the increasing pressure within the facepiece, lever 9 is urged by spring 11 to follow the movement of the diaphragm until lever 9 closes the pilot jet 12. A state of equilibrium will then exist if pressure within the
20 facepiece is maintained at this level.

 When the wearer inhales, pressure within the facepiece falls below the equilibrium level. The diaphragm 1 then moves inwards under the action of spring 6, deflecting the resilient seal 7 and opening the pilot
25 valve 12 again to admit air to the facepiece. When inhalation ceases, pressure within the facepiece will rise again, urging the diaphragm 1 outwards, restoring

08932039 "094797"

the equilibrium pressure level and allowing the pilot valve 12 to close. The diaphragm remains tightly closed on the seal 7 throughout the inhalation phase.

When the wearer exhales, pressure within the facepiece will rise above the equilibrium level, and this pressure difference across diaphragm 1 urges the diaphragm outwards. After a small outward movement of both the diaphragm 1 and the seal 7, the seal 7 reaches the limit of its movement. Diaphragm 1 thereafter continues to move away from the resilient seal 7 to expose a gap around the periphery of the diaphragm 1, through which the excess air is vented to atmosphere. A cover 21, which is shown in dotted lines, protects the assembly from damage and from radiant heat, and has suitably positioned openings (not shown) to allow for the unhindered passage of the exhaled air to atmosphere. These openings also provide a path for sounds transmitted through the diaphragm 1, allowing the clear transmission of speech.

In a preferred development of the invention, in order to allow the wearer to breathe atmospheric air without removal of the facepiece, a lifting and latching means is provided to move the diaphragm 1 away from the resilient seal 7, and to hold it in this open position. In Figure 1, such a lifting arrangement is seen at 30, where the diaphragm 1 is provided with a finger tab 30 projecting downwardly from its lower end. By placing a

08932039-091797

finger to the right (as seen in the Figure) of the tab 30 and moving it to the left, the wearer may move the diaphragm away from seal 7 to allow free ingress and egress of air into the facepiece. It is emphasised that 5 the lever 9 is unmoved by lifting the diaphragm in this way, and thus the demand valve remains closed, conserving the air supply.

In the most preferred embodiment, latching means 30a and 30b are provided to retain the diaphragm in its 10 lifted position. In the embodiment of Figure 1, detent 30a engages with pivoting latch 30b when the diaphragm is lifted by the wearer. Leftwards (as seen in the Figure) pressure at the lower part 30c of pivoting latch 30b causes the latch 30b rotate clockwise and to 15 disengage from the detent 30b, and spring 7 then returns the diaphragm 1 to its initial position in contact with seal 6, to continue the normal operating sequence.

In the illustrated embodiment, lifting the diaphragm 1 opens a port of substantial area, directly in front of 20 the wearer's nose and mouth. The latch may be arranged in other configurations than that shown, provided the latch can operate to hold the diaphragm 1 in the open position. While the latch may be engaged and released, or "tripped", by a single action, such as by pressing a 25 projecting button, release arrangements requiring more determined manipulation are foreseen. In order to prevent inadvertent or accidental opening of the

08932039 "091797"

diaphragm, the latching means is preferably designed so that a double action is required by the wearer to engage the latch, such as by simultaneously depressing two buttons on opposite sides of the valve assembly. When
5 the diaphragm 1 is in the open position, it is necessarily out of contact with lever 9, and thus the pilot valve 12 remains closed, conserving the air supply. The wearer may then remove the facepiece without loss of pressurised air through the demand valve.

10 A manually operated bypass, or override, valve (not shown) may be provided, whereby a controlled flow of air may be admitted to the facepiece at will. Additionally or alternatively, a stop valve may be provided between the pressurised air supply tank and the facepiece, since
15 it will be appreciated that if the wearer removes the facepiece without latching the diaphragm 1 open, the diaphragm 1 will be moved by the spring 6 to open the pilot valve 12 and allow a free flow of air.

In the embodiment shown in Figure 2, the diaphragm
20 1 is mounted on a resiliently biased telescopic support comprising a bearing post 40 attached to the housing of the facepiece and a sleeve 41 attached to the outer face of the diaphragm assembly. A spring 42 surrounds the post 40 and urges the sleeve 41 and diaphragm 1 and the
25 seal 7 towards the wearer. Other mounting arrangements are foreseen for the diaphragm, in addition to the pivotal movement shown in Figure 1 and the rectilinear

08932039-09479

movement illustrated in Figure 2.

In the embodiment seen in Figure 2, the seal 7 is permanently attached to the periphery of the diaphragm 1, and has a sealing lip which contacts the body 8 of the facepiece. The flexible nature of the seal 7 allows the diaphragm to move towards the wearer after making initial sealing contact with the facepiece, so that lever 9 may be operated to open the supply valve 16 in a manner similar to that described with reference to the embodiment shown in Figure 1.

An alternative arrangement for adjusting the position at which the diaphragm opens the demand valve is shown. In this embodiment, the diaphragm 1 is formed with a threaded embossment 1a, and an adjusting screw S extends through the embossment 1a to contact the end of a lever 9 which operates the demand valve (not shown) in a manner similar to that described in relation to Figure 1.

Figures 3A and 3B shown in greater detail the demand valve 3. In Figure 3A, lever 9 is urged by spring 11 (Figure 1) to close the pilot jet 12. Pilot chamber 13 is pressurised by air entering from the metering orifice 15, and resilient sealing disc 16 is urged by this pressure to close the exit ports 18 in the flange 17. Outlet 20 is closed by a resilient flap 19.

When lever 9 is moved by diaphragm 1, pilot jet 12 is opened and air in the pilot chamber 13 escapes through

jet 12 faster than it enters via metering orifice 15, thus depressurising the pilot chamber 13. High pressure in the supply tube 14 then deforms the disc 16, and air can pass from supply tube 14 to outlet ports 18 and
5 thence to outlet 20, where the pressure raises resilient flap 19 and allows air to exit to the interior of the facepiece.

Alternative construction for the demand valve are foreseen, provided that the diaphragm can be arranged so
10 as to open the demand valve when the diaphragm 1 and seal 7 have moved inwardly from their position of initial sealing contact, and can close the demand valve as the diaphragm 1 and seal 7 move outwardly together before the diaphragm loses contact with the seal 7.

15 The facepiece may be a simple assembly of a clear plastics visor 22, attached around its periphery to a resilient seal 23 and secured to the wearer's face by means of an adjustable head harness (also not shown). An opening in the visor 22 accommodates the integrated
20 valve assembly previously described, which may be secured in the opening by means of screws or clips. In the preferred embodiment of the invention shown, the facepiece is provided with an inner half-mask 24.

Air entering the facepiece from the valve outlet 20
25 is directed into the upper area of the visor and passes through non-return flaps 25 into the half-mask 24, to be inhaled by the wearer. Exhaled air passes directly to

089203, 09197

5 the upper area of the wearer's face and minimises the
amount of carbon dioxide inhaled by the wearer.

control arrangement described above may however also be embodied in a facepiece which covers only the wearer's nose and mouth. In such cases it is foreseen that separate eye protection may be provided. This arrangement may be advantageous for example in breathing apparatus intended for aircrew.

round the wearer's neck, and inflated by the gas supply from a demand valve actuated by a diaphragm arrangement as previously described. Where the demand valve is incorporated in a helmet, the helmet may be fully pressurised, or may have a sealing membrane engaging the wearers' head to enclose the nose and mouth and optionally the eyes. The volume within the sealing membrane will be supplied with pressurised air by the

demand valve.

In yet a further alternative, the demand valve may be incorporated into a hood or helmet forming part of a protective garment for the upper body, or of a complete
5 body suit. The demand valve may supply pressurised air at a predetermined temperature to the wearer for respiration, and the same or a further demand valve assembly may supply air to the interior of the garment or suit to cool the wearer.

10 In any of the above-described embodiments, the supply of breathable gas may be from self-contained cylinders carried by the wearer, or may be from a supply reservoir remote from the wearer and connected to the demand valve via a hose.

15 It is envisaged that the components of the demand valve may be moulded from plastics materials, to reduce weight and cost.

08932039.094797

CLAIMS:

1. A facepiece for a breathing apparatus by which breathable gas is supplied to a wearer, the facepiece comprising a supply valve for delivering gas to the interior of the facepiece, and an exhaust opening closeable by an exhaust valve for allowing the egress of gas from the facepiece, wherein the exhaust valve comprises a movable diaphragm which, in a first position, closes the exhaust opening in the facepiece, the diaphragm being movable to a second position displaced toward the interior of the facepiece relative to the first position and still in sealing engagement with the exhaust opening, and a third position displaced outwardly of the facepiece relative to the first position and in which the exhaust opening is open to allow the egress of gas, the diaphragm being biased towards the second position by biasing means, and the diaphragm engaging operating means to open the supply valve when in the second position.
2. A facepiece according to claim 1, wherein a sealing element cooperates with the diaphragm and the periphery of the exhaust opening to seal the diaphragm to the exhaust opening while the diaphragm is in its first position and while it moves between the first and second positions.

3. A facepiece according to claim 2, wherein the sealing element is mounted on the facepiece to surround the exhaust opening.

5 4. A facepiece according to claim 2, wherein the sealing element is mounted on the diaphragm.

5. A facepiece according to claim 1, wherein the diaphragm is pivotally mounted to the facepiece.

10

6. A facepiece according to claim 1, wherein the diaphragm is mounted for rectilinear movement relative to the facepiece.

15 7. A facepiece according to any preceding claim, wherein adjustment means are provided to adjust the distance between the first and second positions of the diaphragm.

20 8. A facepiece according to any preceding claim, wherein the operating means which opens the supply valve is an operating lever.

25 9. A facepiece according to claim 8, wherein adjustment means is provided between the operating lever and the diaphragm to adjust the point on the travel of the diaphragm at which contact with the operating lever is

08932039-09179
45760-602680

made.

10. A facepiece according to claim 9, wherein the
adjustment means comprises a fixed abutment on the
5 diaphragm and a movable abutment mounted on the lever.

11. A facepiece according to claim 9, wherein the
adjustment means comprises a fixed abutment on the lever
and a movable abutment mounted on the diaphragm.

10

12. A facepiece according to any preceding claim,
further including means operable to move the diaphragm
to its third position.

15 13. A facepiece according to any preceding claim,
including releasable means operable to retain the
diaphragm in its third position.

14. A facepiece according to claim 13, wherein the
20 releasable means comprises a movable latch element
engageable with a detent.

15. A facepiece according to claim 14, wherein the latch
element is mounted on the facepiece and the detent is
25 mounted on the diaphragm.

16. A facepiece according to any preceding claim,

3893233-051789

wherein the diaphragm is a speech transmission diaphragm.

17. A facepiece according to any preceding claim,
wherein the interior of the facepiece is divided into
5 upper and lower compartments, the upper compartment
covering the wearer's eyes and having a transparent sight
window, and the lower compartment covering the wearer's
mouth and nasal openings and having the diaphragm mounted
thereon, the supply valve being situated to deliver
10 breathable gas to the upper compartment, and non-return
valves being provided to allow gas to flow from the upper
to the lower compartment only.

18. A facepiece according to any of claims 1 to 16,
15 wherein the facepiece covers the wearers nose and mouth
only.

19. A breathing apparatus to supply breathable gas to
a wearer, comprising a reservoir of breathable gas at
20 superambient pressure and a facepiece sealable to the
wearer to cover the nose and mouth, the facepiece
comprising a supply valve for delivering to the interior
of the facepiece, and an exhaust opening closeable by an
exhaust valve for allowing the egress of gas from the
25 facepiece, wherein the exhaust valve comprises a movable
diaphragm which, in a first position, closes the exhaust
opening in the facepiece, the diaphragm being movable to

00532039.091797

a second position displaced toward the interior of the facepiece relative to the first position and still in sealing engagement with the sealing element, and a third position displaced outwardly of the facepiece relative to the first position and in which the exhaust opening is open to allow egress of gas, the diaphragm being biased towards the second position by biasing means, and the diaphragm engaging operating means to open the supply valve when in the second position.

10

20. A breathing apparatus according to claim 19, wherein a sealing element cooperates with the diaphragm and the periphery of the exhaust opening to seal the diaphragm to the exhaust opening while the diaphragm is in its first position and while it moves between the first and second positions.

15

21. A breathing apparatus according to claim 20, wherein the sealing element is mounted on the facepiece to surround the exhaust opening.

20

22. A breathing apparatus according to claim 21, wherein the sealing element is mounted on the diaphragm.

23. A breathing apparatus according to claim 19, wherein the diaphragm is pivotally mounted to the facepiece.

25

24. A breathing apparatus according to claim 19, wherein the diaphragm is mounted for rectilinear movement relative to the facepiece.

5 25. A breathing apparatus according to any of claims 19 to 24, wherein adjustment means are provided to adjust the distance between the first and second positions of the diaphragm.

10 26. A breathing apparatus according to any of claims 19 to 25, wherein the operating means which opens the supply valve is an operating lever.

15 27. A breathing apparatus according to claim 26, wherein adjustment means is provided between the operating lever and the diaphragm to adjust the point on the travel of the diaphragm at which contact with the operating lever is made.

20 28. A breathing apparatus according to claim 27, wherein the adjustment means comprises a fixed abutment on the diaphragm and a movable abutment mounted on the lever.

25 29. A breathing apparatus according to claim 28, wherein the adjustment means comprises a fixed abutment on the lever and a movable abutment mounted on the diaphragm.

08932039 09489

30. A breathing apparatus according to any of claims 19 to 29, wherein the facepiece further includes means operable to move the diaphragm to its third position.

5 31. A breathing apparatus according to claim 30, wherein the facepiece further includes releasable means operable to retain the diaphragm in its third position.

10 32. A breathing apparatus according to claim 31, wherein the releasable means comprises a movable latch element engageable with a detent.

15 33. A breathing apparatus according to claim 32, wherein the latch element is mounted on the facepiece and the detent is mounted on the diaphragm.

34. A breathing apparatus according to claim 33, wherein the diaphragm is a speech transmission diaphragm.

20 35. A breathing apparatus according to claim 34, wherein the interior of the facepiece is divided into upper and lower compartments, the upper compartment covering the wearer's eyes and having a transparent sight window, and the lower compartment covering the wearer's mouth and
25 nasal openings and having the diaphragm mounted thereon, the supply valve being situated to deliver breathable gas to the upper compartment, and non-return valves being

08932039 "094" 9

provided to allow gas to flow from the upper to the lower compartment only.

36. A breathing apparatus according to claim 35, wherein
5 the facepiece covers the wearer's nose and mouth only.

37. A breathing apparatus according to any of claims 19
to 34, wherein the facepiece forms part of a hood or
helmet containing the head of the wearer.

10

38. A breathing apparatus according to any of claims 19
to 34, wherein the facepiece forms part of a garment
partially or totally enclosing the wearer.

15 39. A hood for a breathing apparatus, incorporating a
facepiece according to any of claims 1 to 17.

40. A garment including a facepiece according to any of
claims 1 to 18.

20

41. A demand valve for a facepiece of a breathing
apparatus, comprising an inlet duct and an outlet
opening, and a valve member movable between open and
closed positions to respectively close and open a valve
25 orifice which when open provides fluid communication
between the inlet duct and the outlet opening, the demand
valve further including a movable cover to close the

outlet opening to prevent the ingress of contaminants, the cover being moved away from the outlet opening by fluid pressure when the valve member is in the open position.

5

42. A demand valve according to claim 41 wherein the movable cover is a resilient flap extending across the outlet opening.

08932039 "094" 87

ABSTRACT

BREATHING APPARATUS

5 A breathing apparatus is described, comprising a supply of breathable gas and a facepiece by which breathable gas is supplied to a wearer, the facepiece comprising a supply valve for delivering gas to the interior of the facepiece, and an exhaust opening closeable by an exhaust valve for allowing the egress of gas from the facepiece, wherein the exhaust valve
10 comprises a movable diaphragm which, in a first position, closes the exhaust opening in the facepiece, the diaphragm being movable to a second position displaced toward the interior of the facepiece relative to the first position and still in sealing engagement with the
15 exhaust opening, and a third position displaced outwardly of the facepiece relative to the first position, and in which the exhaust opening is open to allow the egress of gas, the diaphragm being biased towards the second position by biasing means, and the diaphragm engaging
20 operating means to open the supply valve when in the second position.

A sealing element is preferably interposed between the diaphragm and the exhaust opening.

08932039 "09479"

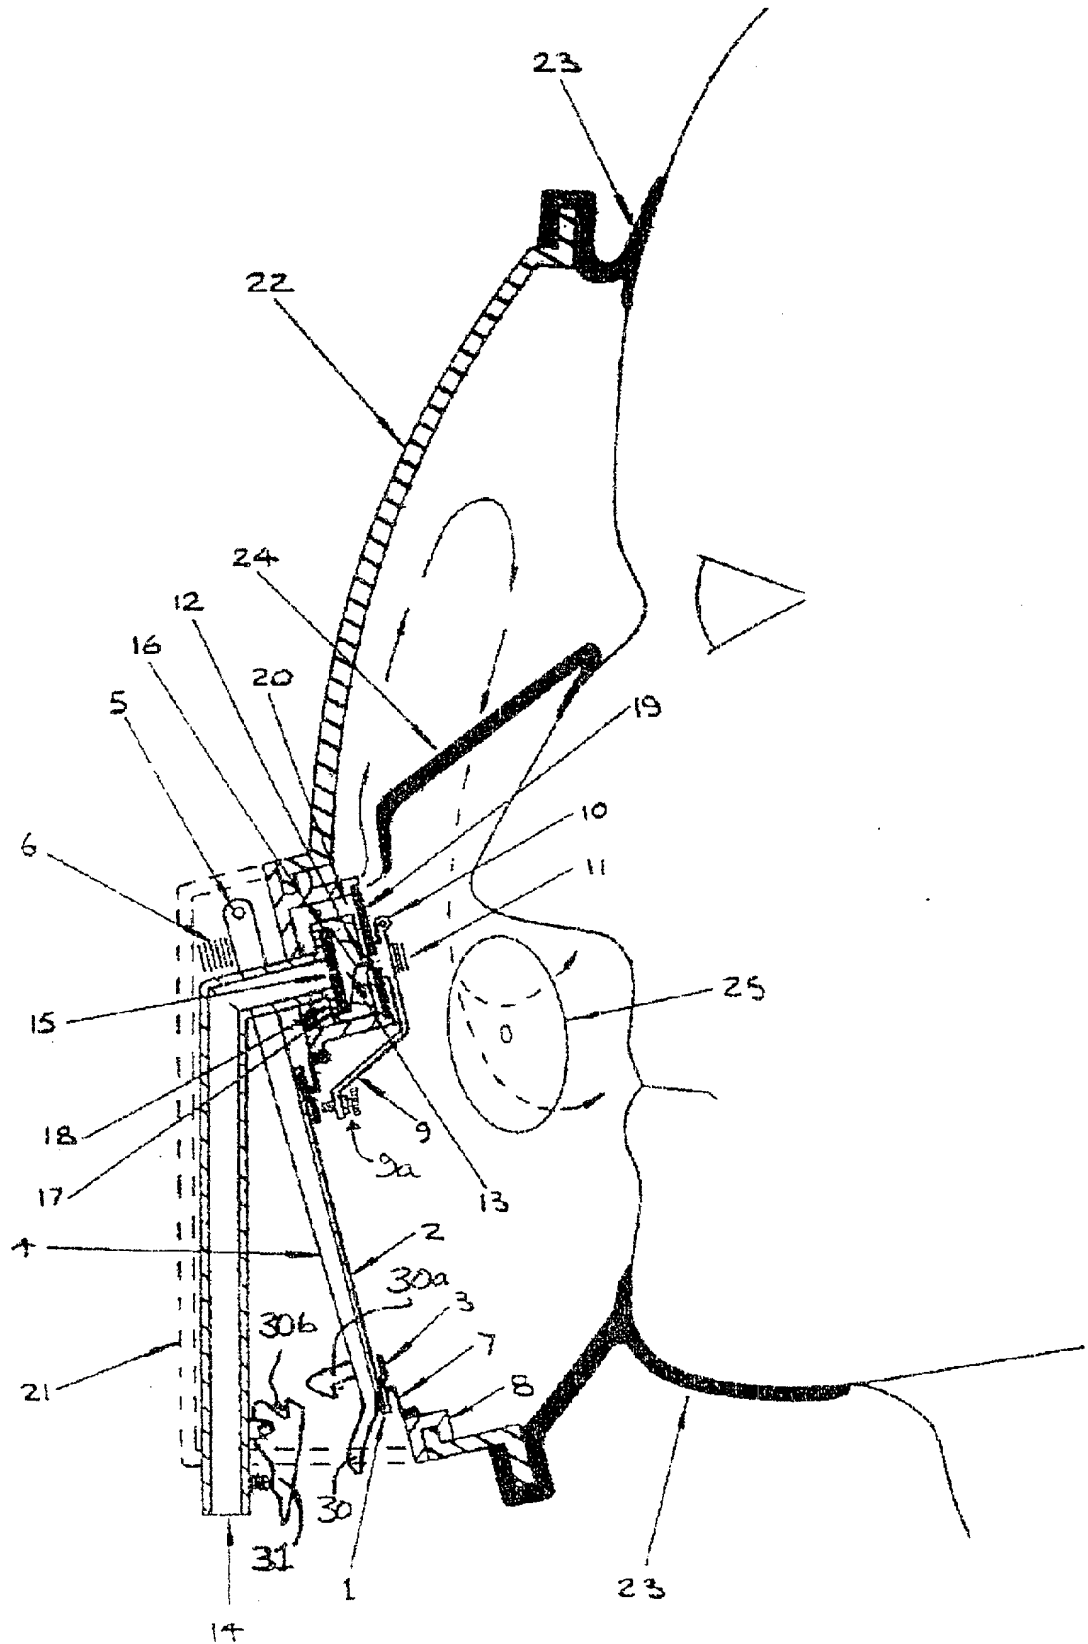


FIG. 1

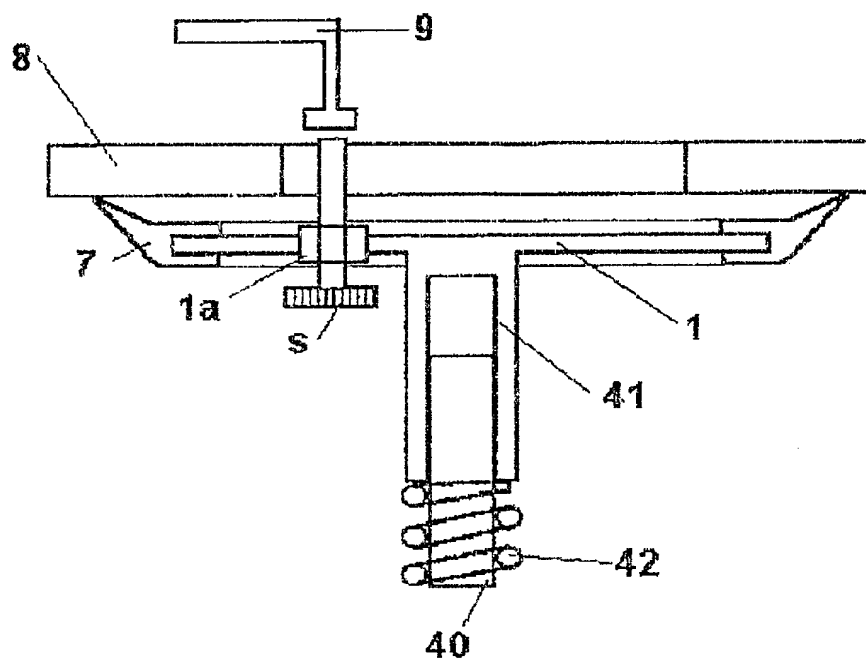


Fig 2

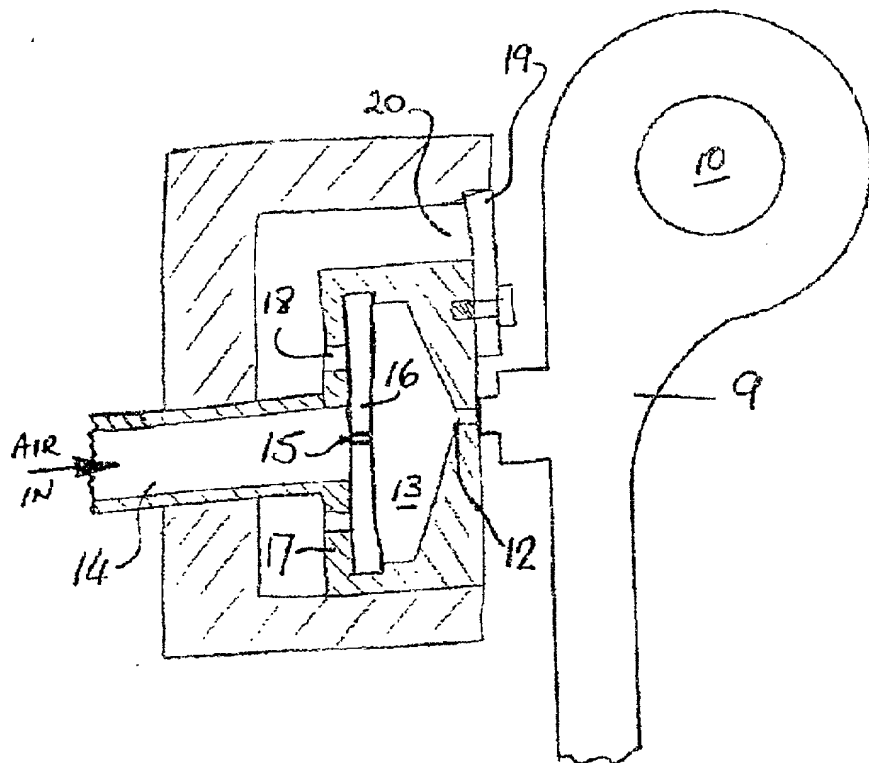


FIG 3A

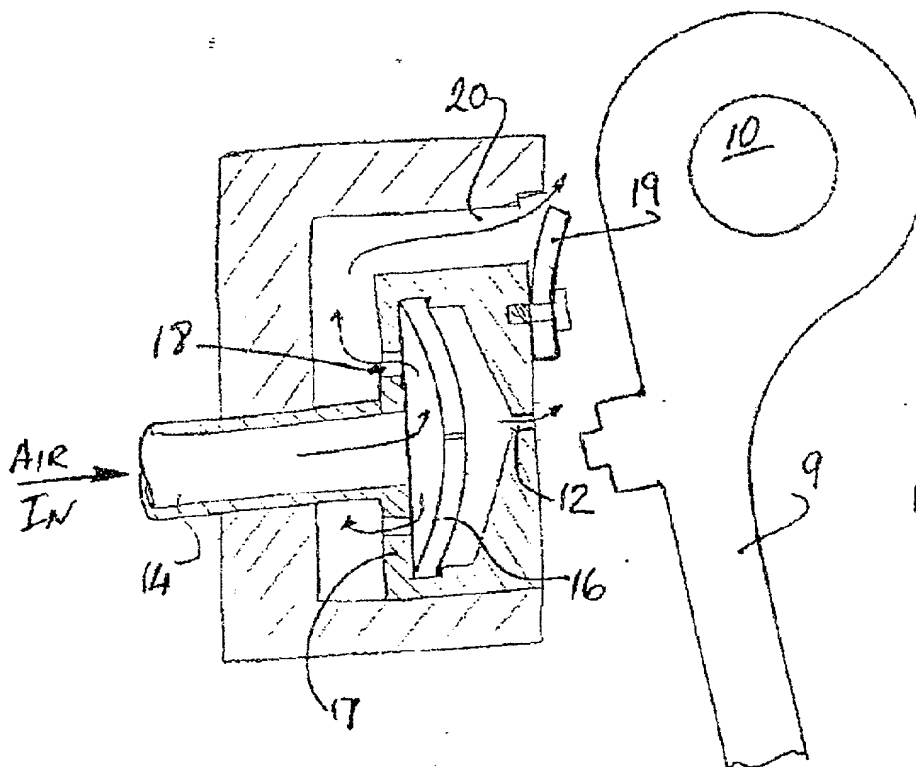


FIG 3B

DECLARATION, POWER OF ATTORNEY, AND PETITION

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I verily believe myself to be the original, first, and sole inventor of the invention titled "**Breathing**

Apparatus and Facepiece Therefor", which is disclosed and claimed in the application that was mailed to the U. S. Patent and Trademark Office on September 17, 1997, and which is disclosed and claimed in British Application No. 9619459.2, filed on 18 September 1996;

I have read and understood the contents of the specification, including the claims, in the said application, as amended by any amendment specifically referred to in this declaration;

I do not know and do not believe that the invention was ever known or used in the United States before my invention thereof, or patented or described in any printed publication in any country before my invention thereof, or more than one year prior to said application; or in public use or on sale in the United States more than one year prior to said application;

I acknowledge my duty to disclose information I am aware of which is material to the examination of the said application in accordance with Section 1.56(a);

The invention has not been patented or made the subject of an inventor's certificate issued before the date of said application in any country foreign to the United States on an application filed by me or my legal representatives or assigns more than twelve months prior to said application; and, as to applications for patents or inventor's certificate on the invention filed in any country foreign to the United States of America, prior to said application by us or our legal representatives or assigns

 no such applications have been filed, or

 X such applications have been filed as follows:

Country	Appln no.	Filing Date	Issue Date	Priority Claimed
U.K.	9619459.2	18 Sept. 1996		Yes

Power of Attorney: As the named inventor, I hereby appoint the following attorney to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

JAMES B. MIDDLETON Reg. No. 26,484

P. O. Box 1968

Decatur, Georgia 30031-1968

Telephone: 404-377-5327

Facsimile: 404-377-5321

Wherefore I pray that Letters Patent be granted to me for the invention or discovery described and claimed in the above identified application, and I hereby subscribe my name to said application as amended, and to this declaration, power of attorney, and petition.

Name of Inventor: Peter Joseph Jackson

Residence: U. K.

Citizenship: U. K.

Post Office Address: 5 Pony Farm, Stable Lane, Findon, Worthing BN14 0RS, U. K.

I declare further that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Signature of Inventor

Peter Joseph Jackson

Date

9-17-97

Attorney File: 1531.01.A

DECLARATION OF SOLE INVENTOR CLAIMING SMALL ENTITY STATUS

As a below named inventor, I hereby declare that I qualify as sole inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees under Section 41(a) and (b) of Title 35, United States code, to the Patent and Trademark Office with regard to the invention entitled "**Breathing Apparatus and Facepiece Therefor**" described in the specification filed on September 17, 1997.

I have not assigned, granted, conveyed or licensed, and am under no obligation under contract or law to assign, grant, convey or license any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).


Each person, concern or organization to which I have assigned, granted, conveyed or licensed or am under an obligation under contract or law to assign, grant, convey or license any rights in the invention is listed below:

International Safety Instruments, Inc.
922 Hurricane Shoals Road
Lawrenceville, Georgia 30243
(a small business concern).

I hereby acknowledge the duty to file, in this application for patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. [37 CFR 1028(b)].

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

SIGNATURE OF INVENTOR:


Peter Joseph Jackson

9-17-97
Date

Attorney File: 1531.01.A

08932039-094797

DECLARATION OF SMALL BUSINESS CONCERN CLAIMING SMALL ENTITY STATUS

I hereby declare that I am an official of the small business concern identified below, and am empowered to act on behalf of the said small business:

International Safety Instruments, Inc.
922 Hurricane Shoals Road
Lawrenceville, Georgia 30243

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 CFR 121.3-18, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees under Section 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties control or have the power to control both.


I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention **Breathing Apparatus and Facepiece Therefor** by the inventor, Peter Joseph Jackson, described in the specification filed on September 17, 1997.

If the rights held by the above identified small business concern are not exclusive, each individual, concern or organization having rights to the invention is listed below and no rights to the invention are held by any other person, other than the inventor, who could not qualify as a small business concern under 37 CFR 1.9(d) or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

NONE

I acknowledge the duty to file, in this application for patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. [37 CFR 1.28(b)].

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.


Paul Hiltman, Engineering Manager

Date 9-17-97

Attorney File 1531.01.A

08932039-091797